

Fact sheet PLUVIAE 50

Production 24h (80% Hr; 25°C)	57L/24h
*Total Power Consumption	1200W
Structure	Stainless Inox
*Weight (Kg)	250Kg
* Gas Compressor	A404A
Rango de acción	8% Hr y 50°C a 100% Hr y 4°C
*Dimensions	a: 115 x 77 cm h: 160 cm
*Power Supply	I-220V y 50Hz
Useful Life	12 years
Noise	58 dBl



Compressor power	+30°C/12% Hr		+25°C/45% Hr		+30°C/80% Hr	
	Water production	Consumption	Water production	Consumption	Water production	Consumption
950w	21L/day	0,58kwh/Litre	48L/day	0,170wh/Litre	57L/day	0,14kwh/Litre

Average conditions Annual maxims	Day power consumption	Night power consumption	power consumption Daily average
+30°C y 15% HR Desert Climate	475 Kwh./m3	108 Kwh./m3	292Kwh/m3
+25°C y 60% HR Clima Subtropical Climate	190 Kwh./m3	40 Kwh./m3	115 Kwh./m3

Fact sheet PLUVIAE 50

AQUAER GENERATOR, S.L.

CIF: B-91464917

☎ (+34) 955.135.387 / 609.484.563

☎ (+34) 954.309.496

✉ info@aqu aer.com

🌐 www.aquaer.com



The Aquaer Generator cool down the air to 0°C by means of a refrigerating plant, specifically designed to that end. It will be a matter of moving more or less air to obtain the required volume of water.

The installation is made mainly out of stain steel and the basic components of the system are as follows: Evaporators, Condensers, Compressors, Extractor Fans, filters and Interchangers.

The generators will be calibrated to operate optimally during the least favourable monthly weather conditions of the project area, thereby assuring the daily projected water output.

As the Aquaer Generator can be designed to work with many different types of energy, other than electricity (thermal solar energy, photovoltaic solar energy, wind energy, etc., thereby keeping the cost of the water obtained at a minimum) it can be installed in any location in the proximity of a needy community. The expected maintenance of the generators is negligible as they function on the same principle as the refrigerator

we know from our homes where hardly any repair work is necessary. It would be relatively easy to train somebody from the relevant community to clean and change air-filters on a regular basis.



External display; Easy Operation

ROUTER: REMOTE CONTROLER

Chemical Water analysis and compared

	Aquaer Water Generator	Walvis Bay Chemical Water Análisis	DWA NAMIBIA Standard		SABS South Africa Standard		Internacional Standard Regarding water quality		
			Class A	Class B	(Guide)	MAX	WHO (Guide)	EU (Guide)	EU MAX
Conductivity	29,2	117	150	300	100	200		400	
PH	7,50	8	6-9	5.5-9.5	6.6-9	9.5	6.5-8.5	6.5-8.5	6.5-8.5
Chloride, mg Cl/Lt	3,5	149	250	600	250	1000	250	250	250
Hardness, mg Ca/Lt	3,8	348B	300	650	500	1000			
Iron ppm	0,06	0.02A	0.1	1	0.1	1		400	
Copper ppm	0,01	0.05A	0.5	1	0.5	1	6.5-8.5	6.5-8.5	6.5-8.5
Nitrates ppm	0,06	3.4A	10	20	6	10	250	250	250


Fact sheet PLUVIAE 50

PRODUCTION LIMITS

Red Zone: There is no water

Yellow zone: Lower production (Special designer)

Blue zone: Production without problem.

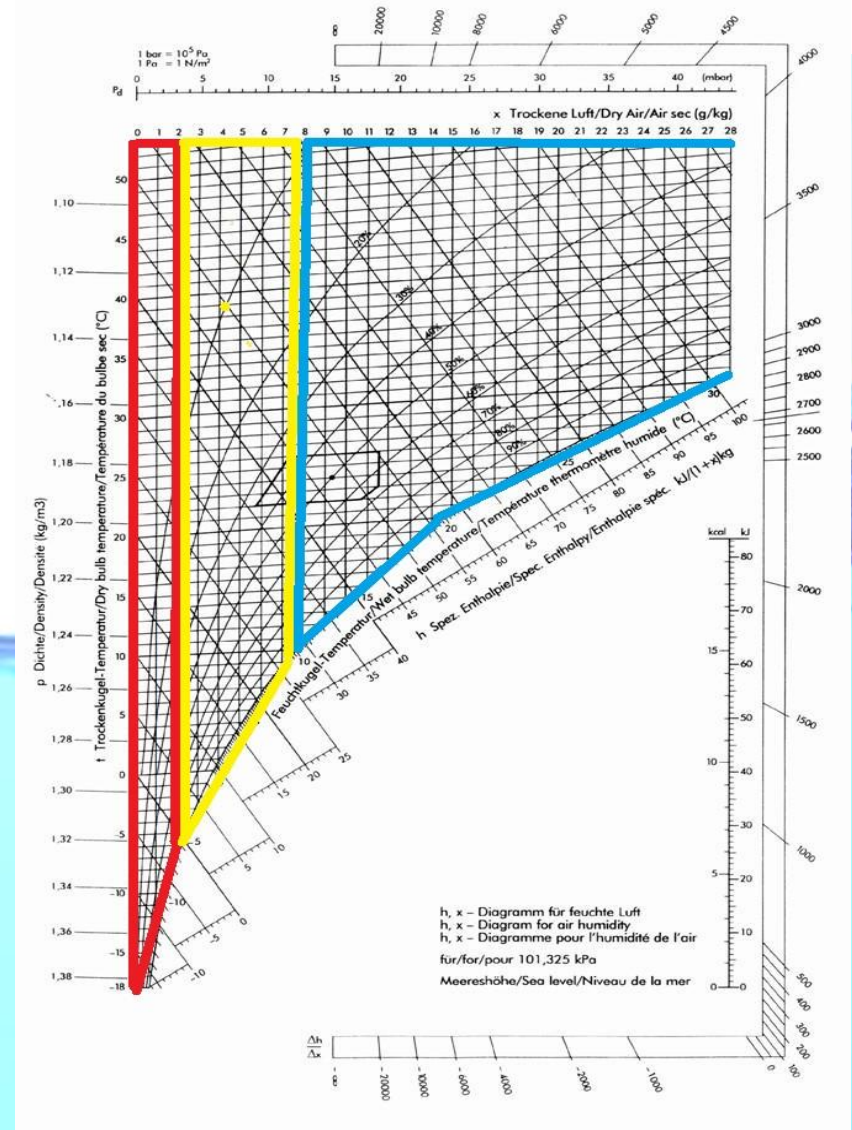

Fact sheet PLUVIAE 50

AQUAER GENERATOR, S.L.

CIF: B-91464917

☎ (+34) 955.135.387 / 609.484.563

☎ (+34) 954.309.496

✉ info@aqu aer.com

🌐 www.aquaer.com



Karachi, Pakistan (150Lt/day)



Estehard, Iran 10.000-20.000lt/day



La Guaira, Colombia 300-400Lit/day